



**P42**


BUILT WITH A HEAVY CARRYNG STRUCTURE. THE AXIAL GEARS IN FORGED AND PROCESSED STEEL AND ALL ROTARY ORGANS ARE ENCLOSED IN AN OIL BATH IN THE REDUCTION GEARBOX IN A STRONG ROLLED SECTION.AN AMBIVALENT WORKING BENCH ALLOWS ANY TYPE OF BENDING WITHOUT SHIFTING THE BAR; BESIDES, IT IS POSSIBLE TO MODIFY THE TYPE OF BEND THROUGH SHIFTING HE PEG IN THE HOLES ON THE WORKING BENCH. THE CONTROLS ALLOWS STOPPING AND RECYCLING AT ANY TIME DURING THE PROCESS. LOW VOLTAGE ELECTRICAL CONTROL EQUIPMENT (24 VOLT).

P55 IS WELL PROVIDED :

- DOUBLE BENDING WITH ROTATING PLATE 350mm.
- BUSHES FROM 60mm.TO 120mm.
- MOTOR HP4
- 1 CHECKING BLOCK
- 1 STIRRUP BENDING PIN
- 1 SQUARE PIN
- 3 BUSH HOLDING PINS+1 PEDAL+1 SET OF BUSHES
- BRACKET BENDER GAUGE, SPIRAL COLLER AND DUAL BENDER ARE AVAILABLE ON RE

P42			
DIMENSIONS	95 X 75 X 105		
WEIGHT	Kg 555		
OIL CAPACITY	Lt. 12		
BENDING CAPACITY			
	1 bar	2 bars	3 bars
R 45 KG/mm2	42 mm	38 mm	32 mm
R 65 KG/mm2	40 mm	32 mm	26 mm
R 80 KG/mm2	36 mm	28 mm	22 mm

EXTRA PANEL CONTROL TO STORAGE UP TO 5 BENDS ON SEQUENCE

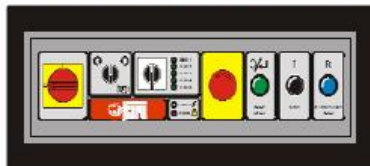

[www.pipeandtubemachines.co.uk](http://www.pipeandtubemachines.co.uk)





**icaro**  
Why you should choose our Benders

**Gears with helicoidal teeth**

**Limit switch plug&bend**

**110 V DC Brake & brake control**

**Motor fixed on gearbox**

**Smart control system**

**Three reduction gears**

**Diagnostic Bluetooth system**

**Voltage display indicator**